BESTANK
Potable Water
Pressure Tank Series
10 bar / 16 bar / 25 bar



BesTanK

CE ISO 9001:2008 REGISTERED



BESTANK–POTABLE WATER PRESSURE TANK SERİES

Fresh-hygienic water is the most important need of the humanity recently . We have to bring the water to our houses with the city network line in a way that the water does not damages its hygienic features. For this reason, in the buildings, factories and other places where hydrophore systems are used, it is obligatory that the membrane inside the hydrophore tank strictly correspond to hygienic standarts.

Bestank potable water tank series provide a high hygienic standarts to its users. The membrane used inside the Bestank Tanks correspond to all European Union and USA potable water hygienic standarts and all the membranes are certified Furthermore , the only point where the water gets in touch with the tank, inlet-outlet, is the flange cover and connector which are made of stainless steel.

Bestanks hydrophore tanks are avaliable in 10 bar- 16 bar and 25 bar which can be used in combined with irrigating pumps, centrifugal pumps and other hydrophore systems in a safe way....





BesTanK

"globally with you"

SPESIFICATIONS

Tank Metal Body

- Interchangable membrane due to screw connection flange cover at the bottom of the tank
- Flange cover and water connector made of stainless steel material
- Resistant up to 10/16/25 bars
- Outer surface with epoxy powder paint
- All tanks CE 97/23 Certified

  Option: Flanges available in carbon steel upon request

Membranes

- High quality EPDM membranes, hygienic certified, approved by European Union and USA Institutions
- DIN 4807-3, NSF-61, WRAS, BS-6920 certified and other quality certificates avaliable

  Option: Butly membranes available upon request

Colour;

Original Colour : Blue - RAL 5015


Optional Colour : Red – RAL 3020

RAL 5015

RAL 3020

Vertical Tanks With Leg

Model	(L) Capacity	(Bar) Pressure	(D) Diameter	(H) Height	Pre- Charge Pressure	Connection
BHT-50VL-PW	50	10-16-25	350 mm	760 mm	2 bar	1 inch
BHT-60VL-PW	60	10-16-25	380 mm	870 mm	2 bar	1 inch
BHT-80VL-PW	80	10-16-25	425 mm	930 mm	2 bar	1 inch
BHT-100VL-PW	100	10-16-25	460 mm	990 mm	4 bar	1 inch
BHT-100VL-PW-WM	100	10-16-25	460 mm	990 mm	4 bar	1 inch
BHT-150VL-PW	150	10-16-25	500 mm	1080 mm	4 bar	1 inch
BHT-200VL-PW	200	10-16-25	600 mm	1120 mm	4 bar	1 inch
BHT-300VL-PW	300	10-16-25	640 mm	1250 mm	4 bar	1 1/4 inch
BHT-500VL-PW	500	10-16-25	750 mm	1490 mm	4 bar	1 1/4 inch
BHT-750VL-PW	750	10-16-25	800 mm	1920 mm	4 bar	2 inch
BHT-850VL-PW	850	10-16-25	800mm	2020 mm	4 bar	2 inch
BHT-1000VL-PW	1000	10-16-25	800 mm	2150 mm	4 bar	2 inch
BHT-1500VL-PW	1500	10-16-25	960 mm	2350 mm	4 bar	2 inch
BHT-2000VL-PW	2000	10-16-25	1100 mm	2450 mm	4 bar	2 1/2 inch
BHT-2500VL-PW	2500	10-16-25	1100 mm	2700 mm	4 bar	2 1/2 inch
BHT-3000VL-PW	3000	10-16-25	1200 mm	2700 mm	4 bar	3 inch
BHT-4000VL-PW	4000	10-16-25	1450 mm	3100 mm	4 bar	3 inch
BHT-5000VL-PW	5000	10-16-25	1450 mm	3400 mm	4 bar	3 inch
BHT-10000VL-PW	10000	10-16-25	1600 mm	5900 mm	4 bar	3 inch

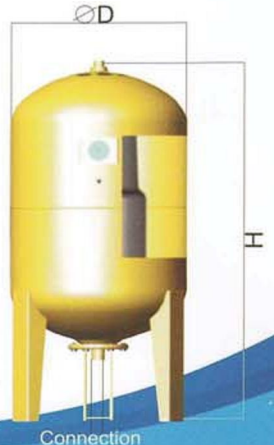


BesTanK

"globally with you"


Vertical Tanks Without Leg

Model	(L) Capacity	(Bar) Pressure	(D) Diameter	(H) Height	Pre- Charge Pressure	Connection
BHT-2V-PW	2	10-16-25	100 mm	270 mm	2 bar	1/2 inch
BHT-5V-PW	5	10-16-25	160 mm	270 mm	2 bar	1/2 inch
BHT-8V-PW	8	10-16-25	200 mm	330 mm	2 bar	1 inch
BHT-12V-PW	12	10-16-25	240 mm	310 mm	2 bar	1 inch
BHT-19V-PW	19	10-16-25	300 mm	370 mm	2 bar	1 inch
BHT-24V-PW	24	10-16-25	300 mm	430 mm	2 bar	1 inch
BHT-24OS-PW	24	10-16-25	350 mm	325 mm	2 bar	1 inch
BHT-24S-PW	24	10-16-25	350 mm	410 mm	2 bar	1 inch
BHT-35V-PW	35	10-16-25	350 mm	450 mm	2 bar	1"
BHT-50V-PW	50	10-16-25	350 mm	610 mm	2 bar	1"
BHT-60V-PW	60	10-16-25	380 mm	650 mm	2 bar	1"



Horizontal Tanks

Model	(L) Capacity	(Bar) Pressure	(D) Diameter	(H) Height	Pre-Charge Pressure	Connection
BHT-19H-PW	19	10-16-25	340 mm	370 mm	2 bar	1 inch
BHT-24H-PW	24	10-16-25	340 mm	430 mm	2 bar	1 inch
BHT-35H-PW	35	10-16-25	400 mm	450 mm	2 bar	1 inch
BHT-50H-PW	50	10-16-25	400 mm	610 mm	2 bar	1 inch
BHT-60H-PW	60	10-16-25	440 mm	730 mm	2 bar	1 inch
BHT-80H-PW	80	10-16-25	520 mm	805 mm	2 bar	1 inch
BHT-100H-PW	100	10-16-25	550 mm	820 mm	4bar	1 inch

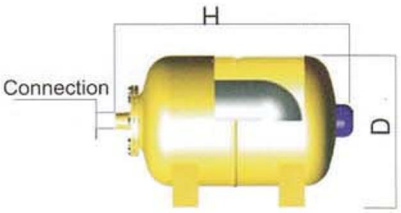

Accessories

BESTANK offers high quality EPDM / Butly Membrane as accessories



Code	Product Name	Volume
BEM-I-8-12	8-12 lt EPDM / Butly Membrane	8-12 lt
BEM-I-18-24	18-24lt EPDM / Butly Membrane	18-24 lt
BEM-I-24	24lt EPDM / Butly Membrane	24 lt
BEM-I-35-50	35-50lt EPDM / Butly Membrane	35-50 lt
BEM-I-50-60	50-60lt EPDM / Butly Membrane	60-80 lt
BEM-I-80-100	80-100lt EPDM / Butly Membrane	80-100 lt
BEM-I-100-150	100-150lt EPDM / Butly Membrane	100-150 lt
BEM-I-150-200	150-200lt EPDM / Butly Membrane	150-200 lt
BEM-I-200-300	200-300lt EPDM / Butly Membrane	200-300 lt
BEM-I-500-750	500-750lt EPDM / Butly Membrane	500-750 lt
BEM-I-1000-2000	1000-2000tl EPDM / Butly Membrane	1000-2000 lt

BesTanK

"globally with you"